

Recessed luminaire series EMLR/EMMLR K ...

**Design:** Stand alone luminaire, white powder coated steel housing. The luminaire body accommodates all electrical gear and fixings for the louvre and secondary reflector. Secondary reflector in matt white coated aluminium. With electronic multiwatt ballasts (EVG) 220-240V, 0/50-60 Hz

**Mounting:** For mounting in a variety of ceiling systems using suitable fixing kits, or lay-in installation in exposed T ceiling systems with ceiling tiles. No additional fixing accessories are required for lay-in installation.

**EMLR K ... PS (Module 625)**


**EMMLR K ... PS (Module 600)**

White painted frame in aluminium with laid-in acrylic (PMMA) prismatic panel.

**EMLR...SM (Module 625)**

**EMMLR...SM (Module 600)**

Parabolic mirror louvre SM in high-reflectance, matt anodised super-purity aluminium.

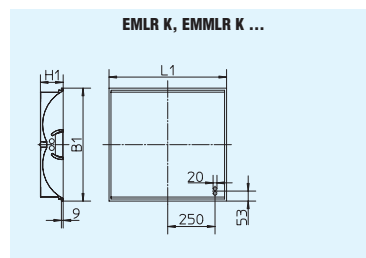

Voltage: 230V/50Hz  
 Protection class: IP 20  
 Approvals:



**EMLR K ... PS (Module 625)**  
**EMMLR K ... PS (Module 600)**

**EMLR K...SM (Module 625)**  
**EMMLR K...SM (Module 600)**



Model	Lamps	Dimens. [mm]					Ceiling type	magnetic ballast Prod. code	electronic ballast Prod. code	dim. ballast (DALI) Prod. code
		L1	B1	H1	LE*	BE*				
EMLR K 155 PS	1xTC-L 55 W	622	622	120	604	604	1 2 3 4		0822692	0832692
EMLR K 180 PS	1xTC-L 80 W	622	622	120	604	604	1 2 3 4		0822693	0832693
EMMLR K 155 PS	1xTC-L 55 W	597	597	120	579	579	1 2 3 4		0822694	0832694
EMMLR K 180 PS	1xTC-L 80 W	597	597	120	579	579	1 2 3 4		0822695	0832695
EMLR K 155 SM	1xTC-L 55 W	622	622	120	604	604	1 2 3 4		0822256	0832256
EMLR K 180 SM	1xTC-L 80 W	622	622	120	604	604	1 2 3 4		0822688	0832688
EMMLR K 155 SM	1xTC-L 55 W	597	597	120	579	579	1 2 3 4		0822246	0832246
EMMLR K 180 SM	1xTC-L 80 W	597	597	120	579	579	1 2 3 4		0822689	0832689

\* Ceiling cut-out

Accessories

Model	Description	Prod. code
10-013	Universal fixing kit for 23 to 55mm clamping range	0210013
10-017	Universal fixing kit for 45 to 80mm clamping range	0210017



10-013, 10-017

