

Display light HRL 400/570/650 ../-HIE

Design: Extruded aluminium luminaire housing. Upper housing is for fixing the control gear and the lower housing to accommodate the lampholders. Aluminium-coloured surface finish. Cable strain relief device prefitted for connecting cable.

Mounting: Pendant mounting and ceiling fixing with accessories for direct ceiling mounting. Fixing accessories are to be provided on site.

Note: Only use lamps suitable for use with an HSE ballast.

Only operate the HRL 400.. with These luminaires may only be used with lamps approved for open operation. HRL 570 and HRL 650 with accessory C / F may also be used with lamps for closed operation.

HRL ... PC/ ... -HIE


Transparent polycarbonate reflector (PC) with light reflecting prisms.

HRL ... PM/ ... -HIE

Transparent reflector made of acrylic (PMMA) with light refracting prisms.

HRL ... SM/ ... -HIE

Parabolic reflector made of anodised super-purity aluminium, with satin surface.

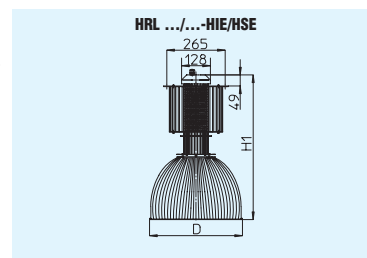

Voltage: 230V/50Hz

Protection class: IP 21

Approvals:



HRL ... PC/ ... -HIE



HRL ... PM/ ... -HIE



HRL ... SM/ ... -HIE



Model	Lamps	Lamph.	Dimens. [mm]		Trim attachments											magnetic ballast Prod. code	electronic ballast Prod. code	dimm. ballast (DALI) Prod. code	
			H1	D	A	B	C	D	E	F	J	K	N	O	Q				
HRL 400 PC/250-HIE	1xHIE 250 W	E40	642	400	-	-	-	-	-	-	-	x	x	x	x	-	0300551		
HRL 400 PC/400-HIE	1xHIE 400 W	E40	672	400	-	-	-	-	-	-	-	x	x	x	x	-	0300548		
HRL 400 PM/250-HIE	1xHIE 250 W	E40	642	400	-	-	-	-	-	-	-	x	x	x	x	-	0300500		
HRL 400 PM/400-HIE	1xHIE 400 W	E40	672	400	-	-	-	-	-	-	-	x	x	x	x	-	0300501		
HRL 570 PM/250-HIE	1xHIE 250 W	E40	706	570	-	-	x	-	-	-	x	x	x	x	-	0300502			
HRL 650 PM/400-HIE	1xHIE 400 W	E40	750	650	-	-	-	-	-	-	x	x	x	x	-	0300503			
HRL 400 SM/250-HIE	1xHIE 250 W	E40	642	400	-	-	-	-	-	-	-	x	x	x	-	0300504			
HRL 400 SM/400-HIE	1xHIE 400 W	E40	672	400	-	-	-	-	-	-	-	x	x	x	-	0300505			