

Recessed luminaire series EMLS/EMMLS ...

Design: Stand alone luminaire, white powder coat finish steel housing. The luminaire body accommodates all electrical gear and fixings for the primary and secondary reflector. With electronic ballasts (EVG) 220-240V, 0/50-60 Hz


Mounting: For mounting in different ceiling systems using suitable fixing kits, or lay-in installation in exposed T ceiling systems with ceiling tiles. No additional fixing accessories are required for lay-in installation.

EMLS K ... (Module 625) 625x625

Primary reflectors: Curved opal acrylic (PMMA) reflectors to each side with a controlled degree of transmission.
Secondary reflectors: Gullwing in matt white coated steel.

EMMLS K ... (Module 600) 600x600

Primary reflectors: Curved opal acrylic (PMMA) reflectors to each side with a controlled degree of transmission.
Secondary reflectors: Gullwing in matt white coated steel.

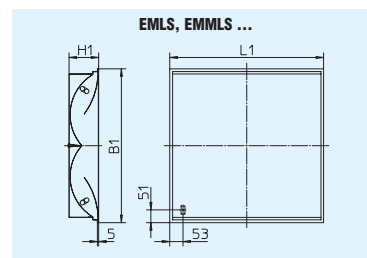

Voltage: 230V/50Hz
Protection class: IP 20
acc. to VDE 0711/0875



EMLS K ... (Module 625)

EMMLS K ... (Module 600)



Model	Lamps	Dimens. [mm]				LE*	BE*	Ceiling type	magnetic ballast	electronic ballast	dim. ballast (DALI)
		L1	B1	H1	Prod. code				Prod. code	Prod. code	
EMLS K 240	2xTC-L 40 W	622	622	120	604	604	1 2 3 4		0827467	0837467	
EMLS K 255	2xTC-L 55 W	622	622	120	604	604	1 2 3 4		0827471		
EMLS K 255/80	2xTC-L 55/80 W	622	622	120	604	604	1 2 3 4		0827469	0837469	
EMMLS K 240	2xTC-L 40 W	597	597	120	579	579	1 2 3 4		0827468	0837468	
EMMLS K 255	2xTC-L 55 W	597	597	120	579	579	1 2 3 4		0827472		
EMMLS K 255/80	2xTC-L 55/80 W	597	597	120	579	579	1 2 3 4		0827470	0837470	

* Ceiling cut-out

Accessories

Model	Description	Prod. code
10-013	Universal fixing kit for 23 to 55mm clamping range	0210013
10-017	Universal fixing kit for 45 to 80mm clamping range	0210017



10-013, 10-017

