

Recessed luminaire series EMLR/EMMLR ...

Design: Stand alone luminaire, white powder coated steel housing. The luminaire body accommodates all electrical gear and fixings for the louvre and secondary reflector. Secondary reflector in matt white coated aluminium. With electronic multiwatt ballasts (EVG) 220-240V, 0/50-60 Hz

Mounting: For mounting in different ceiling systems using suitable fixing kits, or lay-in installation in exposed T ceiling systems with ceiling tiles. No additional fixing accessories are required for lay-in installation.

EMLR ... PS (Module 625)


EMMLR ... PS (Module 600)

White painted frame in aluminium with laid-in acrylic (PMMA) prismatic panel.

EMLR ... SM (Module 625)

EMMLR ... SM (Module 625)

Parabolic mirror louvre SM in high-reflectance, matt anodised super-purity aluminium.

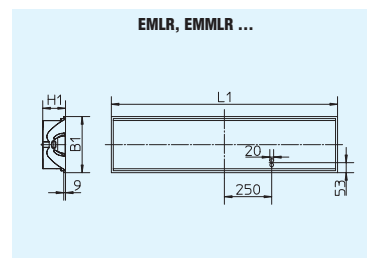

Voltage: 230V/50Hz

Protection class: IP 20

Approvals:




EMLR ... PS (Module 625)

EMMLR ... PS (Module 600)

EMLR ... SM (Module 625)

EMMLR ... SM (Module 600)

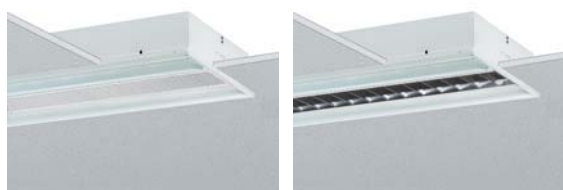

Model	Lamps	Dimens. [mm]			LE*	BE*	Ceiling type	magnetic ballast Prod. code	electronic ballast Prod. code	dimm. ballast (DALI) Prod. code
		L1	B1	H1						
EMLR 128/54 PS	1xT16 28/54 W	1247	310	120	1229	292	1 2 4 6		0822696	0832696
EMLR 135/49 PS	1xT16 35/49 W	1547	310	120	1529	292	1 2 4 6		0822697	0832697
EMLR 214/24 PS	2xT16 14/24 W	622	310	120	614	292	1 2 4		0822698	0832698
EMLR 228/54 PS	2xT16 28/54 W	1247	310	120	1229	292	1 2 4 6		0822699	0832699
EMLR 235/49 PS	2xT16 35/49 W	1547	310	120	1529	292	1 2 4 6		0822700	0832700
EMMLR 128/54 PS	1xT16 28/54 W	1197	297	120	1179	279	1 2 4 6		0822701	0832701
EMMLR 135/49 PS	1xT16 35/49 W	1497	297	120	1479	279	1 2 4 6		0822702	0832702
EMMLR 214/24 PS	2xT16 14/24 W	597	297	120	589	279	1 2 4		0822703	0832703
EMMLR 228/54 PS	2xT16 28/54 W	1197	297	120	1179	279	1 2 4 6		0822704	0832704
EMMLR 235/49 PS	2xT16 35/49 W	1497	297	120	1479	279	1 2 4 6		0822705	0832705
EMLR 128/54 SM	1xT16 28/54 W	1247	310	120	1229	292	1 2 4 6		0822706	0832706
EMLR 135/49 SM	1xT16 35/49 W	1547	310	120	1529	292	1 2 4 6		0822707	0832707
EMLR 214/24 SM	2xT16 14/24 W	622	310	120	614	292	1 2 4		0822708	0832708
EMLR 228/54 SM	2xT16 28/54 W	1247	310	120	1229	292	1 2 4 6		0822709	0832709
EMLR 235/49 SM	2xT16 35/49 W	1547	310	120	1529	292	1 2 4 6		0822710	0832710
EMMLR 128/54 SM	1xT16 28/54 W	1197	297	120	1179	279	1 2 4 6		0822711	0832711
EMMLR 135/49 SM	1xT16 35/49 W	1497	297	120	1479	279	1 2 4 6		0822712	0832712
EMMLR 214/24 SM	2xT16 14/24 W	597	297	120	589	279	1 2 4		0822713	0832713
EMMLR 228/54 SM	2xT16 28/54 W	1197	297	120	1179	279	1 2 4 6		0822714	0832714
EMMLR 235/49 SM	2xT16 35/49 W	1497	297	120	1479	279	1 2 4 6		0822715	0832715

* Ceiling cut-out

Accessories

Model	Description	Prod. code
10-013	Universal fixing kit for 23 to 55mm clamping range	0210013
10-017	Universal fixing kit for 45 to 80mm clamping range	0210017
10-127	Fixing kit for trim strip ceilings	0210127



10-013, 10-017

10-127